



GLS AVIATION OBSTRUCTION LIGHT


APPLICATIONS

- Chimneys
- High rise structures
- Television & Microwave transmission towers



CONSTRUCTION

- Die Cast aluminium corrosion resistant housing fitted with heat resistant red colour polycarbonate dome and lamp holder is prewired upto terminal block.
- Epoxy powder coated painting.
- Lamp holder base GES E-27 & 2 Pin BC, skirted porcelain.
- Synthetic rubber gasket.
- Cable entry for single 1/2" BSP and for double 3/4" BSP.

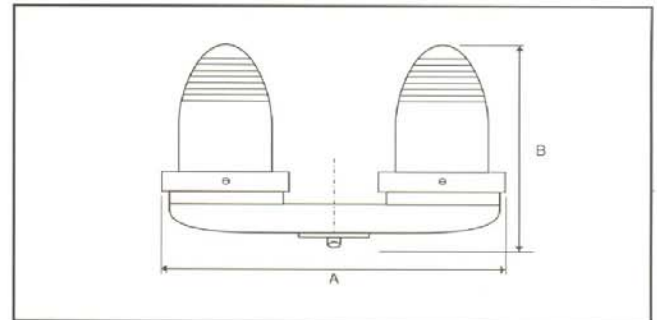

ELECTRICAL DATA & DIMENSIONS

IP-43

Cat. Ref.	Lamp			Nominal or Rated Voltage (V)	Mains current (A)	Dimensions (mm)		App. Wt. (Kgs)	Std. Pkg. (Nos.)
	Type	No.	Wattage			A	B		
NGA-S-100	GLS	1	100	240	0.41	165	255	0.9	8
NGA-T-100	GLS	2	100	240	0.82	465	270	2.4	4
NGA-S-100 (ES)	GLS	1	100	240	0.41	165	255	0.9	8
NGA-T-100 (ES)	GLS	2	100	240	0.82	465	270	2.4	4

Data subject to change due to improvement in design